








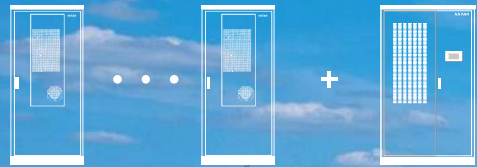

20 in parallel, 1MW/2MWh



250KW/500kWh

All In One C&I Energy Storage System CATL Battery Solutions

-  **Peaking shaving**
-  **Time of Use**
-  **Self consumption**
-  **Demand control**
-  **Battery priority**
-  **Export limitation**



KAC50DP

50KW modular power converter



Flexible Configuration

- Modular Design, Expanding as Required
- Small&Light, Wall Mounted
- Installed in Parallel for Expansion



Powerful Function

- Support PV+ESS
- Grid Support, Equipped with SVG Technology
- On-Grid and Off-Grid Operation



Reliable Protection

- Outdoor IP65 Design
- Sufficient Protection Functions Equipped

Product Specifications	KAC50DP
PV Side	
Max. Input Voltage	1000V
MPPT Voltage Range	350V~800V
Max. Current per MPPT	36A
Number of MPPT	3
Number of Inputs Per MPPT	2
Battery Side	
Max. Input Voltage	750V
Min. Input Voltage	350V
DC Voltage at Nominal Operation	500V~750V
Max. DC Current	55A*2
Max. DC Input Power	55kW
Number of DC Inputs	2
AC Side(On Grid)	
Nominal AC Output Power	50kW
Max. AC Output Power	55kVA
Max. AC Current	80A
Nominal AC Voltage	400V
AC Voltage Range	340V~440V
Nominal Grid Frequency/Frequency Range	50/60Hz±5Hz
THDv	<3%(100% Load)
Adjustable PF Range	-1(Lagging)~1(Leading)
AC Side(Off Grid)	
Nominal AC Voltage	230/400V±3%; 3L+N+PE
THDv	<3%(Linear Load)
Nominal Grid Frequency/Frequency Range	50/60Hz
Nominal AC Output Power	50kW
Max. AC Output Power	55kVA
Efficiency	
Max. Efficiency	97.5%
Protection	
Reverse Connection Protection	Yes
DC Switch	Yes
Over-Temperature Protection	Yes
Grid Monitoring/ Earthing Fault Detection	Yes
Insulation Monitoring	Yes
DC/AC Surge Protection	DC Type II; AC Type III
General Parameters	
Dimensions(WxHxD)	650*715*325mm
Weight	75KG
Topology	Transformerless
IP Protection	IP65
Operation Temperature Range	-25~60°C(>45°C Derating)
Operation Humidity Range	0~100%(No Condensing)
Cooling Method	Intelligent Air Cooling
Max. Operation Altitude	3000m
Communication Port	RS485/CAN
Standards	IEC62477;IEC61000;CE;GB/T;IEC62109;IEC61683;IEC60068;IEC61727;IEC62116;EN50549;VDE4105;G99

BC100DME

100kWh outdoor All-in-one ESS cabinet



Safe&Reliable

- CATL LFP Battery Cell
- Double Fire Suppression System Design
- 1+1 Redundancy Design



Simple&User-Friendly

- Pre-installed in Factory for Easy Installation on Site
- Integrated BMS/EMS, Suitable for Various Applications
- Effortless Operation, Cloud Control



Economical&Efficient

- Save Capex, Expanding as Required
- Efficient and Energy-saving HVAC Design

Outdoor battery cabinet parameters

Technical Parameters	BC100DME
Battery Type	LFP
Battery Module Capacity	5.12kWh
Number of Modules	10*2
Total Battery Capacity	102.4kWh
Nominal Voltage	512V
Operating Voltage Range	448V~565V
Charge/Discharge Rate	Max. 0.5C
DoD	90%

General Parameters	BC100DME
Dimensions(WxDxH)	1100 x 1100 x2380 mm
Weight	<1.5T
Installation Site	Outdoor
IP Protection	IP54
Anti Corrosion Level	C4
Operation Humidity	5%~95% (No Condensing)
Operation Temperature	-30°C~+50°C
Max. Operation Altitude	4000m (>3000m Derating)
Communication Port	Ethernet;CAN
Communication Protocol	CAN;MODBUS TCP/IP
Cooling Method	Air Conditioner
Standards	IEC62619-2017;UN38.3;IEC61000-6-2/4

KAC50DP-BC100DME

50kW/100kWh outdoor All-in-one ESS cabinet



Safe&Reliable

- CATL LFP Battery Cell
- Double Fire Suppression System Design
- 1+1 Redundancy Design



Simple&User-Friendly

- Pre-Installed in Factory for Easy Installation on Site
- Integrated BMS/EMS, Suitable for Various applications
- Effortless Operation, Cloud Control



Economical&Efficient

- Save Capex, Expanding as Required
- Efficient and Energy-Saving HVAC Design

Outdoor Battery Cabinet Parameters

Technical Parameters	
Battery Type	LFP
Battery Module Capacity	5.12kWh
Number of Modules	10*2
Total Battery Capacity	102.4kWh
Nominal Voltage	512V
Operating Voltage Range	448V~565V
Charge/Discharge Rate	Max. 0.5C
DoD	90%

General Parameters	
Dimensions(WxDxH)	1100 x 1100 x2380 mm
Weight	<1.5T
Installation Site	Outdoor
IP Protection	IP54
Anti Corrosion Level	C4
Operation Humidity	5%~95% (No Condensing)
Operation Temperature	-30°C~+50°C
Max. Operation Altitude	4000m (>3000m Derating)
Communication Port	Ethernet;CAN
Communication Protocol	CAN;MODBUS TCP/IP
Cooling Method	Air Conditioner
Standards	IEC62619-2017;UN38.3;IEC61000-6-2/4

Product Specifications	KAC50DP
PV Side	
Max. Input Voltage	1000V
MPPT Voltage Range	350V~800V
Max. Current per MPPT	36A
Number of MPPT	3
Number of Inputs Per MPPT	2
Battery Side	
Max. Input Voltage	750V
Min. Input Voltage	350V
DC Voltage at Nominal Operation	500V~750V
Max. DC Current	55A*2
Max. DC Input Power	55kW
Number of DC Inputs	2
AC Side(On Grid)	
Nominal AC Output Power	50kW
Max. AC Output Power	55kVA
Max. AC Current	80A
Nominal AC Voltage	400V
AC Voltage Range	340V~440V
Nominal Grid Frequency/Frequency Range	50/60Hz±5Hz
THDv	<3%(100% Load)
Adjustable PF Range	-1(Lagging)~1(Leading)
AC Side(Off Grid)	
Nominal AC Voltage	230/400V±3%; 3L+N+PE
THDv	<3%(Linear Load)
Nominal Grid Frequency/Frequency Range	50/60Hz
Nominal AC Output Power	50kW
Max. AC Output Power	55kVA
Efficiency	
Max. Efficiency	97.5%
Protection	
Reverse Connection Protection	Yes
DC Switch	Yes
Over-Temperature Protection	Yes
Grid Monitoring/ Earthing Fault Detection	Yes
Insulation Monitoring	Yes
DC/AC Surge Protection	DC Type II;AC Type III
General Parameters	
Dimensions(WxHxD)	650*715*325mm
Weight	75KG
Topology	Transformerless
IP Protection	IP65
Operation Temperature Range	-25~60°C(>45°C Derating)
Operation Humidity Range	0~100%(No Condensing)
Cooling Method	Intelligent Air Cooling
Max. Operation Altitude	3000m
Communication Port	RS485/CAN
Standards	IEC62477;IEC61000;CE;GB/T;IEC62109;IEC61683;IEC60068;IEC61727;IEC62116;EN50549;VDE4105;G99